

Hydraulic ALLROUNDER 630 S

Automotive


Number of cavities:
4 + 4 + 4

Part weight: 3 g

Cycle time: 30 s

Material: PC; ABS; TPE

Application: Thumb wheel
car interior (automotive)

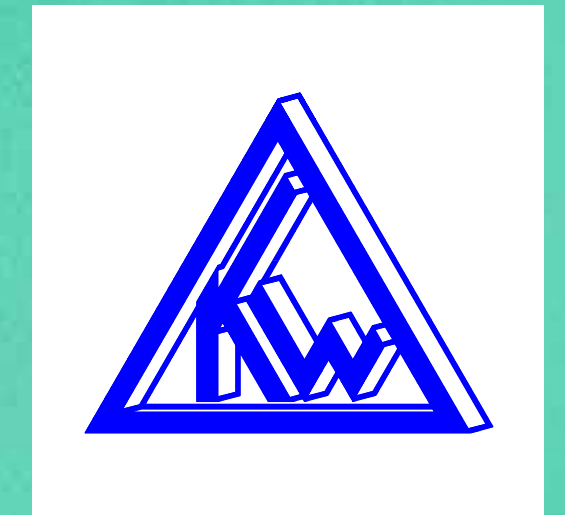

Hydraulic ALLROUNDER 630 S


Functional integration with hard/soft combination

Targeted combination of materials

- TPE: soft-touch surface
- ABS: electroplatable visible surface
- PC: rigid, translucent basic body

Hydraulic ALLROUNDER 630 S

Systematic multi-component processing

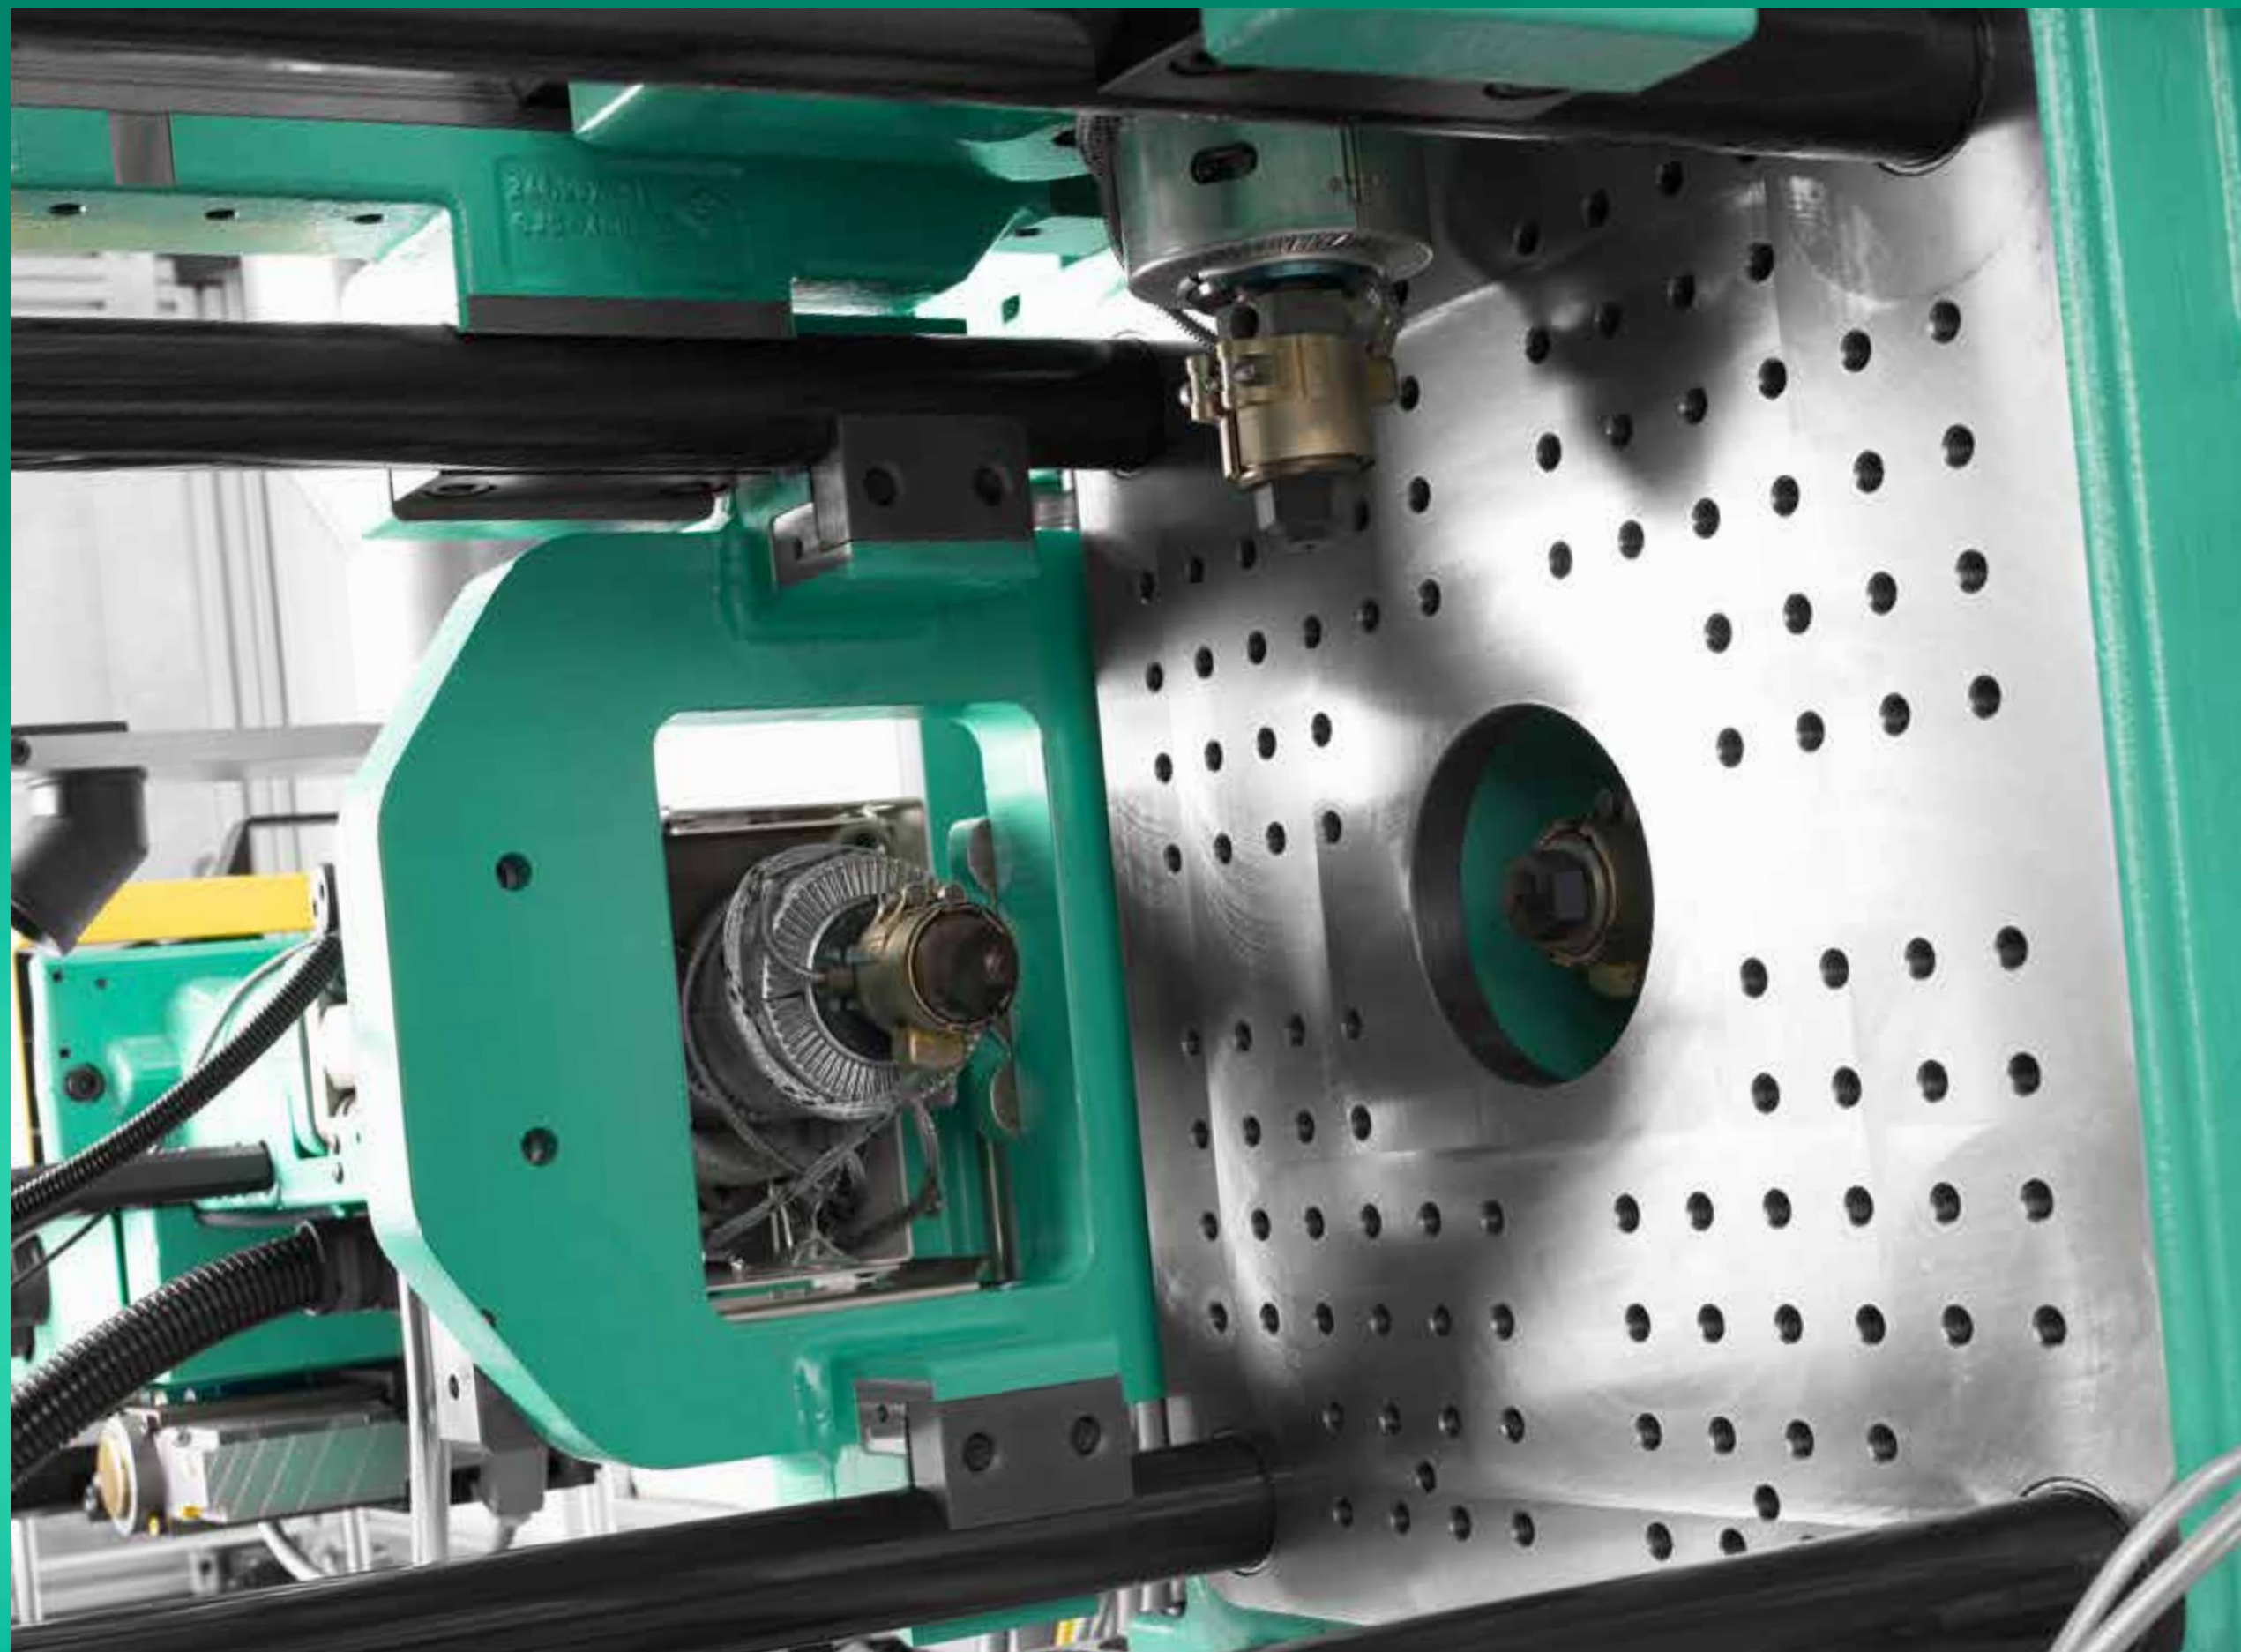

Precisely adapted technology

- Mould functions integrated in SELOGICA
- Flexible arrangement of injection units
- Vertical injection unit and removal

Hydraulic ALLROUNDER 630 S

Enhanced production efficiency



**Process-reliable
operation –
with precisely
adapted technology**

- Production of multi-functional parts in a single step
- Simple start-up – one central control system
- Targeted process optimisation