


270 H 350 – 100

Mobility

- 270 H 350 – 100
 - Part test specimen
 - Cavities 1
 - Cycle time 50s
 - Material PK, POKETONE M 33AA2Y
 - Shot weight 38g

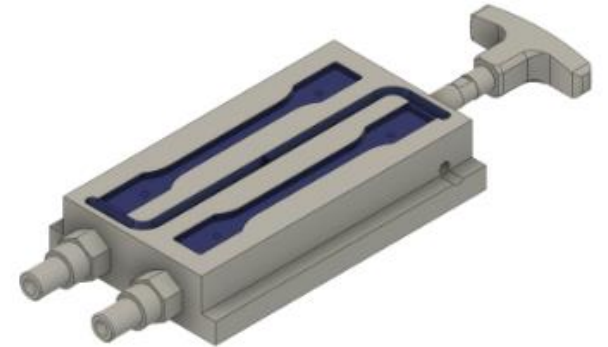

270 H 350 – 100

Highlight

- Processing of Polyketon
 - Feeding of additives into cylinder module via a defined unit
 - Melting of the „critical“ material in a protective atmosphere
 - No coating formation / material damage during processing

270 H 350 – 100

Highlight

- Leakage Monitoring
 - wf plastic – Nozzle Melt Monitor
 - Monitoring at machine nozzle through differential pressure measurement
 - Machine stop due to alarm input
 - Less downtime and repair costs



270 H 350 – 100

- 270 H 350 – 100
 - Partner
Mold & Leakage monitoring
Material
 - wf plastic GmbH, D
K.D. Feddersen GmbH & Co. KG, D