

370 S 700 – 290

Mobility

- 370 S 700 – 290
 - Part Handle shell
 - Cavities 1
 - Cycle time 60s
 - Material PC/ABS, Cypoloy XCY620S
 - Shot weight 35g
 - Removal and set down on conveyor belt with Kuka



370 S 700 – 290

Highlight


- Material designed for Interieur / Exterior in automotive industry
 - High-gloss depth effect with metallic
 - Extreme scratch resistance
 - Very impact and temperature resistant
→ no risk of risk of splintering
 - No „finishing“ through painting necessary

370 S 700 – 290

„Ensure part quality “

- PressurePilot
 - Larger process window due to improved balancing with multiple moulds
 - Avoidance of melt front stoppages with alternative materials
 - No pressure drop between injection and holding pressure

→ **Reduction of the reject rate**

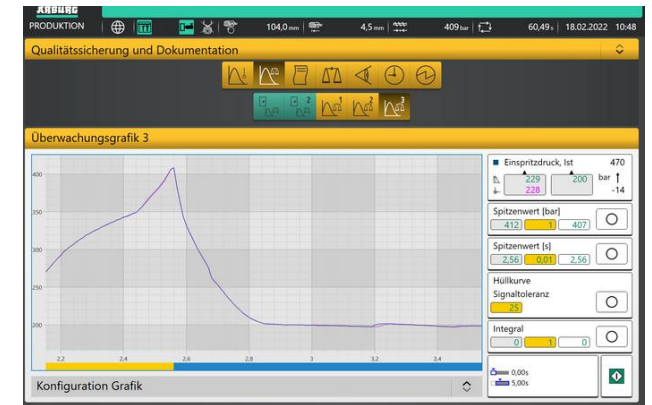

370 S 700 – 290

- 370 S 700 – 290
 - Partner
Material

GRÄSSLIN Süd GmbH, D